


# Orion-Tr DC-DC converters isolated

www.aeppacific.co.nz

100 / 250 / 400 Watt

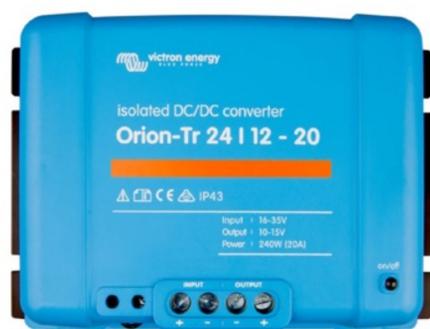

Orion-Tr 24/12-20 (240 W)



Orion-Tr 24/12-20 (240 W)

### Remote on/off terminal

The remote on/off terminal eliminates the need for a high current switch in the input wiring. The remote on/off can be operated with a low power switch or by for example the engine run/stop switch (see manual).

### All models are short circuit proof and can be paralleled to increase output current

An unlimited number of units can be connected in parallel.

### High temperature protected

The output current will reduce at high ambient temperature.

### IP43 protection

When installed with the screw terminals oriented downwards.

### Screw terminals

No special tools needed for installation.

### Input fuse (not replaceable)

On 12 V and 24 V input models only.

### Adjustable output voltage

Not intended for battery charging.

Please consider using an Orion-Tr Smart for battery charging.

| Isolated converters<br>110 – 120 W                                | Orion-Tr<br>12/12-9<br>(110 W)   | Orion-Tr<br>12/24-5<br>(120 W) | Orion-Tr<br>24/12-9<br>(110 W) | Orion-Tr<br>24/24-5<br>(120 W) | Orion-Tr<br>24/48-2,5<br>(120 W) | Orion-Tr<br>48/12-9<br>(110 W) | Orion-Tr<br>48/24-5<br>(120 W) | Orion-Tr<br>48/48-2,5<br>(120 W) |
|---|--|--------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|--------------------------------|----------------------------------|
| Input voltage range (1)   | 8-17 V   | 8-17 V                         | 16-35 V                        | 16-35 V                        | 16-35 V                          | 32-70 V                        | 32-70 V                        | 32-70 V                          |
| Under voltage shut down   | 7 V  | 7 V                            | 14 V                           | 14 V                           | 14 V                             | 28 V                           | 28 V                           | 28 V                             |
| Under voltage restart   | 7,5 V  | 7,5 V                          | 15 V                           | 15 V                           | 15 V                             | 30 V                           | 30 V                           | 30 V                             |
| Nominal output voltage  | 12.2 V   | 24.2 V                         | 12.2 V                         | 24.2 V                         | 48.2 V                           | 12.2 V                         | 24.2 V                         | 48.2 V                           |
| Output voltage adjust range                                       | 10-15 V  | 20-30 V                        | 10-15 V                        | 20-30 V                        | 40-60 V                          | 10-15 V                        | 20-30 V                        | 40-60 V                          |
| Output voltage tolerance  | +/- 0.2 V  |                                |                                |                                |                                  |                                |                                |                                  |
| Output noise  | 2mV rms  |                                |                                |                                |                                  |                                |                                |                                  |
| Cont. output current at nominal output voltage and 25 °C          | 9 A  | 5 A                            | 9 A                            | 5 A                            | 2.5 A                            | 9 A                            | 5 A                            | 2.5 A                            |
| Maximum output current (10 s) at nominal output voltage           | 12.5 A   | 6.3 A                          | 12.5 A                         | 6.3 A                          | 3.0 A                            | 12.5 A                         | 6.3 A                          | 3.0 A                            |
| Short circuit output current                                      | 32 A   | 23 A                           | 39 A                           | 30 A                           | 19 A                             | 27 A                           | 25 A                           | 17 A                             |
| Cont. output power at 25 °C                                       | 110 W  | 120 W                          | 110 W                          | 120 W                          | 120 W                            | 110 W                          | 120 W                          | 120 W                            |
| Cont. output power at 40 °C                                       | 85 W   | 110 W                          | 85 W                           | 115 W                          | 115 W                            | 85 W                           | 100 W                          | 85 W                             |
| Efficiency  | 87 %   | 88 %                           | 85 %                           | 87 %                           | 88 %                             | 87 %                           | 86 %                           | 89 %                             |
| No load input current (2)   | < 50 mA  | < 80 mA                        | < 40 mA                        | < 60 mA                        | < 120 mA                         | < 50 mA                        | < 60 mA                        | < 80 mA                          |
| Current consumption   | < 200uA when disabled via its remote port  |                                |                                |                                |                                  |                                |                                |                                  |
| Galvanic isolation  | 200 V dc between input, output and case  |                                |                                |                                |                                  |                                |                                |                                  |
| Operating temperature range                                       | -20 to +55 °C (derate 3 % per °C above 40 °C)  |                                |                                |                                |                                  |                                |                                |                                  |
| Humidity  | Max. 95 % non-condensing   |                                |                                |                                |                                  |                                |                                |                                  |
| DC connection   | Screw terminals  |                                |                                |                                |                                  |                                |                                |                                  |
| Maximum cable cross-section                                       | 6 mm <sup>2</sup> AWG10  |                                |                                |                                |                                  |                                |                                |                                  |
| Weight  | 0,42 kg (1 lb)   |                                |                                |                                |                                  |                                |                                |                                  |
| Dimensions hxxxd  | 100 x 113 x 47 mm (4.0 x 4.5 x 1.9 inch)   |                                |                                |                                |                                  |                                |                                |                                  |
| Standards: Safety<br>Emission<br>Immunity<br>Automotive Directive | EN 60950<br>EN 61000-6-3, EN 55014-1<br>EN 61000-6-2, EN 61000-6-1, EN 55014-2<br>ECE R10-5  |                                |                                |                                |                                  |                                |                                |                                  |
| 1)  | If set to nominal or lower than nominal, the output voltage will remain stable within the specified input voltage range (buck-boost function).<br>If the output voltage is set higher than nominal by a certain percentage, the minimum input voltage at which the output voltage remains stable (does not decrease) increases by the same percentage. |                                |                                |                                |                                  |                                |                                |                                  |
| 2)  | Current consumption when the Orion-Tr is generating output voltage but no load is applied.   |                                |                                |                                |                                  |                                |                                |                                  |

See page two for 250 W and 400 W models

| Isolated converters<br>220 - 280 Watt                             | Orion-Tr<br>12/12-18<br>(220 W)   | Orion-Tr<br>12/24-10<br>(240 W) | Orion-Tr<br>24/12-20<br>(240 W) | Orion-Tr<br>24/24-12<br>(280 W) | Orion-Tr<br>24/48-6<br>(280 W) | Orion-Tr<br>48/12-20<br>(240 W) | Orion-Tr<br>48/24-12<br>(280 W) | Orion-Tr<br>48/48-6<br>(280 W) |
|---|---|---------------------------------|---------------------------------|---------------------------------|--------------------------------|---------------------------------|---------------------------------|--------------------------------|
| Input voltage range (1)   | 8-17 V  | 8-17 V                          | 16-35 V                         | 16-35 V                         | 16-35 V                        | 32-70 V                         | 32-70 V                         | 32-70 V                        |
| Under voltage shut down   | 7 V   | 7 V                             | 14 V                            | 14 V                            | 14 V                           | 28 V                            | 28 V                            | 28 V                           |
| Under voltage restart   | 7,5 V   | 7,5 V                           | 15 V                            | 15 V                            | 15 V                           | 30 V                            | 30 V                            | 30 V                           |
| Nominal output voltage  | 12.2 V  | 24.2 V                          | 12.2 V                          | 24.2 V                          | 48.2 V                         | 12.2 V                          | 24.2 V                          | 48.2 V                         |
| Output voltage adjust range                                       | 10-15 V   | 20-30 V                         | 10-15 V                         | 20-30 V                         | 40-60 V                        | 10-15 V                         | 20-30 V                         | 40-60 V                        |
| Output voltage tolerance  | +/- 0,2 V   |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Output noise  | 2 mV rms  |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Cont. output current at nominal output voltage and 40 °C          | 18 A  | 10 A                            | 20 A                            | 12 A                            | 6 A                            | 20 A                            | 12 A                            | 6 A                            |
| Maximum output current (10 s) at nominal output voltage           | 25 A  | 15 A                            | 25 A                            | 15 A                            | 8 A                            | 25 A                            | 15 A                            | 8 A                            |
| Short circuit output current                                      | 40 A  | 25 A                            | 50 A                            | 30 A                            | 25 A                           | 50 A                            | 30 A                            | 25 A                           |
| Cont. output power at 25 °C                                       | 280 W   | 280 W                           | 300 W                           | 320 W                           | 320 W                          | 280 W                           | 320 W                           | 320 W                          |
| Cont. output power at 40 °C                                       | 220 W   | 240 W                           | 240 W                           | 280 W                           | 280 W                          | 240 W                           | 280 W                           | 280 W                          |
| Efficiency  | 87 %  | 88 %                            | 88 %                            | 89 %                            | 89 %                           | 87 %                            | 89 %                            | 89 %                           |
| No load input current (2)   | < 80 mA   | < 100 mA                        | < 100 mA                        | < 80 mA                         | < 120 mA                       | < 80 mA                         | < 80 mA                         | < 80 mA                        |
| Current consumption   | < 200uA when disabled via its remote port   |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Galvanic isolation  | 200 VDC between input, output and case  |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Operating temperature range                                       | -20 to +55 °C (derate 3 % per °C above 40 °C)   |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Humidity  | Max. 95 % non-condensing  |                                 |                                 |                                 |                                |                                 |                                 |                                |
| DC connection   | Screw terminals   |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Maximum cable cross-section                                       | 16 mm <sup>2</sup> AWG6   |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Weight  | 1,3 kg (3 lb)   |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Dimensions hwxwd  | 130 x 186 x 70 mm (5.1 x 7.3 x 2.8 inch)  |                                 |                                 |                                 |                                |                                 |                                 |                                |
| Standards: Safety<br>Emission<br>Immunity<br>Automotive Directive | EN 60950<br>EN 61000-6-3, EN 55014-1<br>EN 61000-6-2, EN 61000-6-1, EN 55014-2<br>ECE R10-5 |                                 |                                 |                                 |                                |                                 |                                 |                                |

| Isolated converters<br>360 - 400 Watt                             | Orion-Tr<br>12/12-30<br>(360 W)  | Orion-Tr<br>12/24-15<br>(360 W) | Orion-Tr<br>12/48-8<br>(380 W) | Orion-Tr<br>24/12-30<br>(360 W) | Orion-Tr<br>24/24-17<br>(400 W) | Orion-Tr<br>24/48-8,5<br>(400 W) | Orion-Tr<br>48/12-30<br>(360 W) | Orion-Tr<br>48/24-16<br>(380 W) | Orion-Tr<br>48/48-8<br>(380 W) |
|---|--|---------------------------------|--------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------------------|--------------------------------|
| Input voltage range (1)   | 8-17 V   | 8-17 V                          | 8-17 V                         | 16-35 V                         | 16-35 V                         | 16-35 V                          | 32-70 V                         | 32-70 V                         | 32-70 V                        |
| Under voltage shut down   | 7 V  | 7 V                             | 7 V                            | 14 V                            | 14 V                            | 14 V                             | 28 V                            | 28 V                            | 28 V                           |
| Under voltage restart   | 7,5 V  | 7,5 V                           | 7,5 V                          | 15 V                            | 15 V                            | 15 V                             | 30 V                            | 30 V                            | 30 V                           |
| Nominal output voltage  | 12.2 V   | 24.2 V                          | 48.2 V                         | 12.2 V                          | 24.2 V                          | 48.2 V                           | 12.2 V                          | 24.2 V                          | 48.2 V                         |
| Output voltage adjust range                                       | 10-15 V  | 18-30 V                         | 40-60 V                        | 10-15 V                         | 18-30 V                         | 40-60 V                          | 10-15 V                         | 18-30 V                         | 40-60 V                        |
| Output voltage tolerance  | +/- 0,2 V  |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Output noise  | 2 mV rms   |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Cont. output current at nominal output voltage and 40°C           | 30 A   | 15 A                            | 8 A                            | 30 A                            | 17 A                            | 8,5 A                            | 30 A                            | 16 A                            | 8 A                            |
| Maximum output current (10 s) at nominal output voltage minus 20% | 40 A   | 25 A                            | 15 A                           | 45 A                            | 25 A                            | 15 A                             | 40 A                            | 25 A                            | 15 A                           |
| Short circuit output current                                      | 60 A   | 40 A                            | 25 A                           | 60 A                            | 40 A                            | 25 A                             | 60 A                            | 40 A                            | 25 A                           |
| Cont. output power at 25°C  | 430 W  | 430 W                           | 430 W                          | 430 W                           | 480 W                           | 480 W                            | 430 W                           | 430 W                           | 430 W                          |
| Cont. output power at 40°C  | 360 W  | 360 W                           | 380 W                          | 360 W                           | 400 W                           | 400 W                            | 360 W                           | 380 W                           | 380 W                          |
| Efficiency  | 87 %   | 88 %                            | 89 %                           | 88 %                            | 89 %                            | 89 %                             | 87 %                            | 89 %                            | 89 %                           |
| No load input current (2)   | < 80 mA  | < 100 mA                        | < 220 mA                       | < 100 mA                        | < 80 mA                         | < 120 mA                         | < 80 mA                         | < 80 mA                         | < 80 mA                        |
| Current consumption   | < 200uA when disabled via its remote port  |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Galvanic isolation  | 200 VDC between input, output and case   |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Operating temperature range                                       | -20 to +55 °C (derate 3 % per °C above 40 °C)  |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Humidity  | Max. 95 % non-condensing   |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| DC connection   | Screw terminals  |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Maximum cable cross-section                                       | 16 mm <sup>2</sup> (AWG6)  |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Weight  | 12 V input and/or 12 V output models: 1.8 kg (4 lb). Other models: 1,6 kg (3.5 lb)   |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Dimensions hwxwd  | 12 V input and/or 12 V output models: 130 x 186 x 80 mm (5.1 x 7.3 x 3.2 inch)<br>Other models: 130 x 186 x 70 mm (5.1 x 7.3 x 2.8 inch) |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |
| Standards: Safety<br>Emission<br>Immunity<br>Automotive Directive | EN 60950<br>EN 61000-6-3, EN 55014-1<br>EN 61000-6-2, EN 61000-6-1, EN 55014-2<br>ECE R10-5  |                                 |                                |                                 |                                 |                                  |                                 |                                 |                                |

- 1) If set to nominal or lower than nominal, the output voltage will remain stable within the specified input voltage range (buck-boost function). If the output voltage is set higher than nominal by a certain percentage, the minimum input voltage at which the output voltage remains stable (does not decrease) increases by the same percentage.
- 2) Current consumption when the Orion-Tr is generating output voltage but no load is applied.